




Bronto Skylift S-XDT



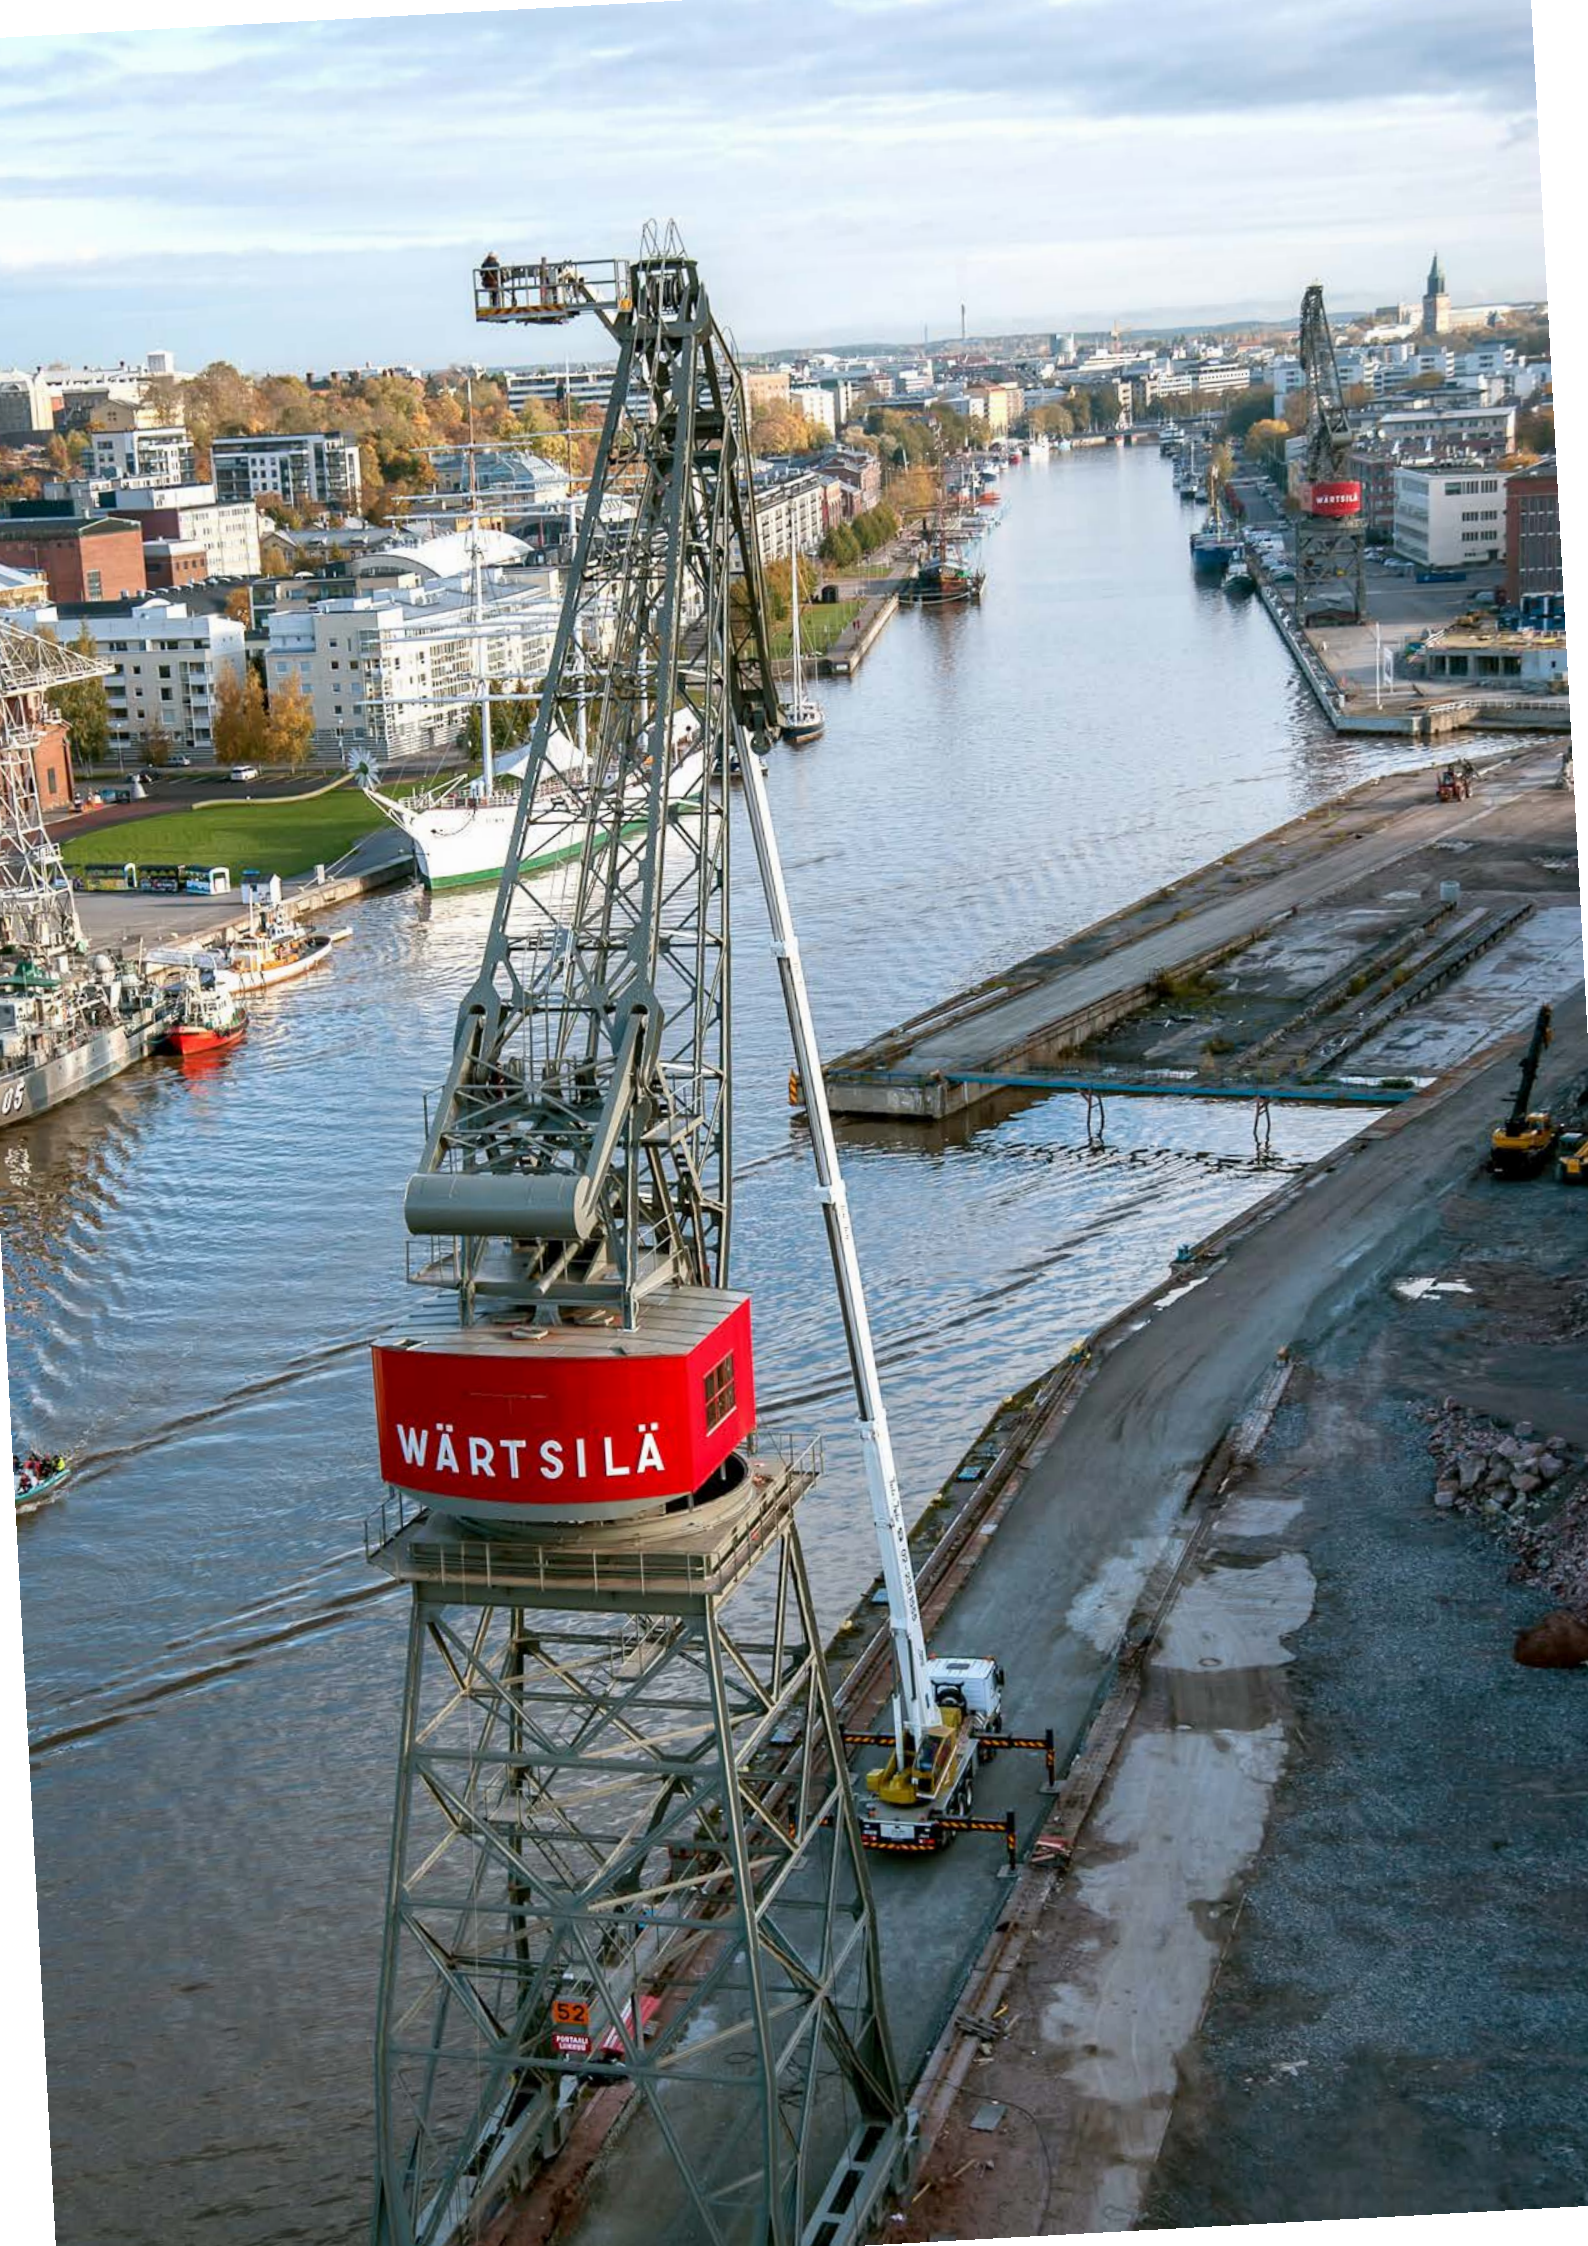

WÄRTSILÄ

52

PORTAL

WÄRTSILÄ

Up for the challenge

We are always aiming higher in our mission to provide the best solution for professionals working at height. The XDT has all the key features required from a perfect aerial work platform.

These units have a telescopic cage boom, increased working load and compact design to make the work at heights more efficient and much easier, while the Bronto + control system keeps you safe and lets you focus on the job.




It's not only how high you can go with an aerial, but also how safely you do it. As always, your safety is our top priority. With our work platforms you can get where you need to be, and return home safely.








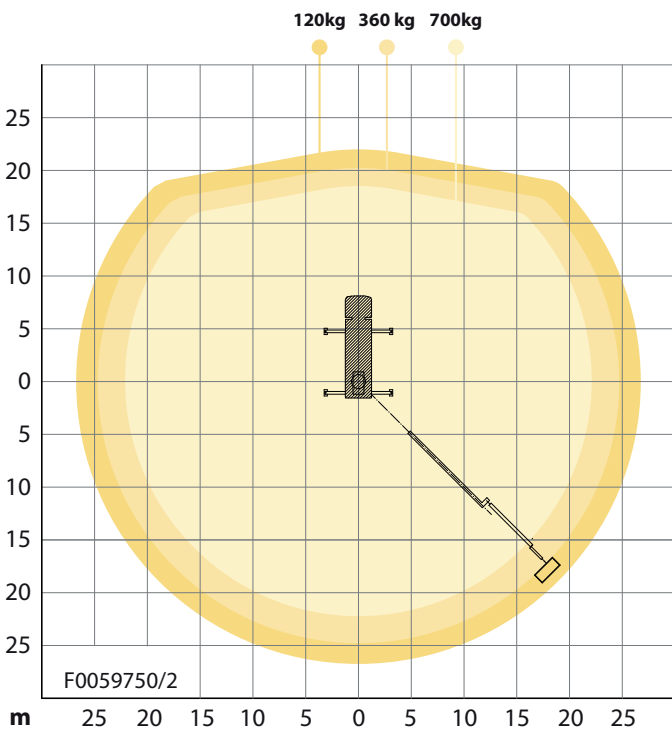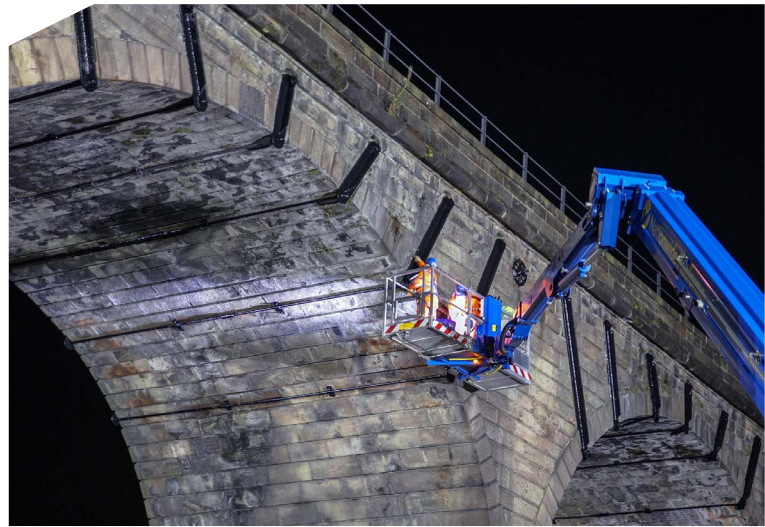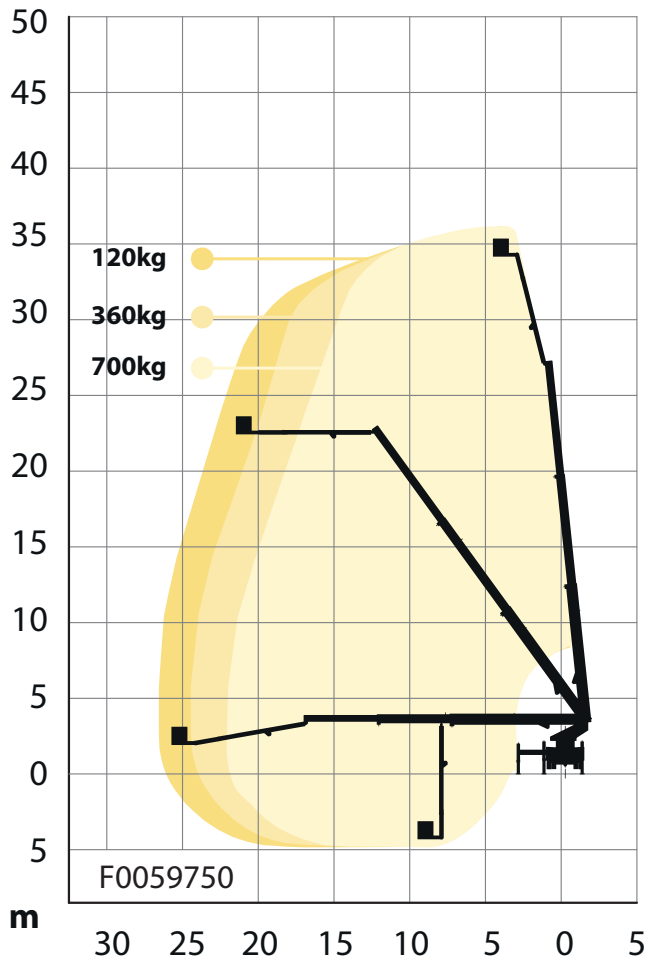


XDT key features

- Working height from 36 to 78 metres
- Working outreach up to 38 metres
- Maximum cage load of 700 kg
- Easy to use and precise Bronto+ control system
- Lifetime support to maintain high resale value



S36XDT












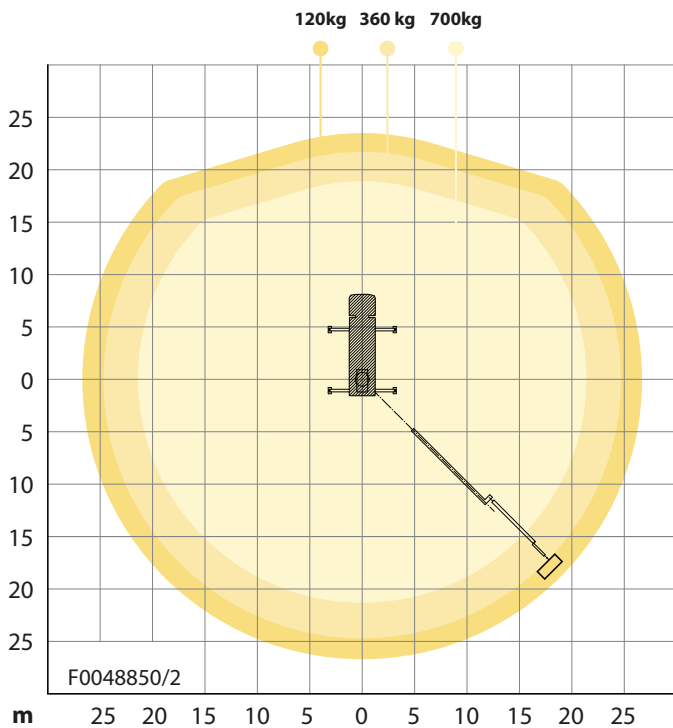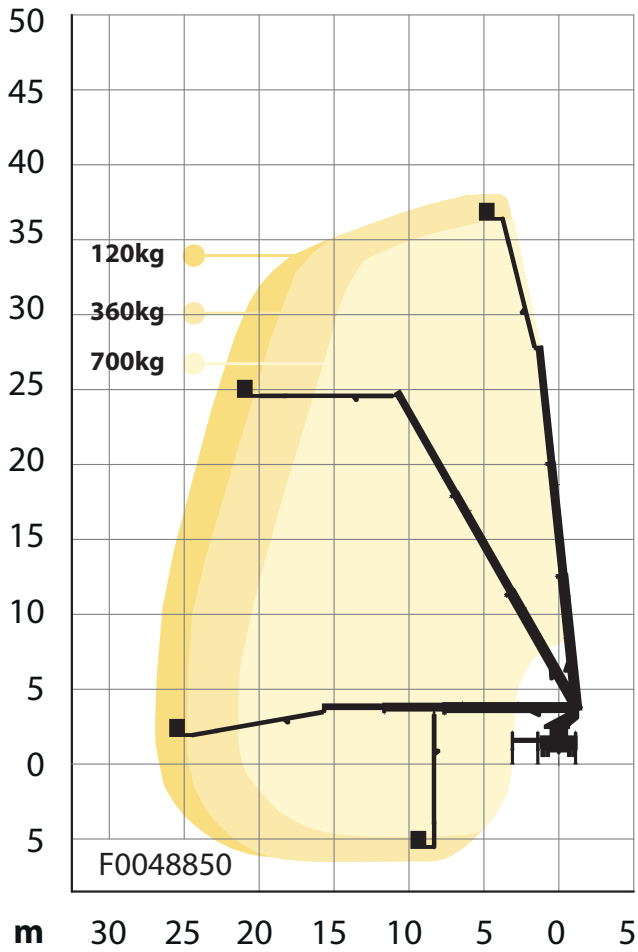


- 
36 m
- 
2 x 90°
- 
27 m
- 
2 x 280°
- 
34 m
- 
3.7 m *
- 
700 kg
- 
<10 m *
- 
1,1 x 2,4 m (3,7 m)
- 
18 t *

* depending on chassis

Diagrams presented with standard configuration. Variations apply.

S38XDT



- 
38 m

2 x 90°
- 
27 m

2 x 280°
- 
36 m

3.7 m *
- 
700 kg

<10 m *
- 
**1,1 x 2,4 m
(3,7 m)**

18 t *

* depending on chassis

Diagrams presented with standard configuration. Variations apply.